

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/002341 A1

- (51) International Patent Classification⁷: A61B 17/66
- (21) International Application Number: PCT/EP2002/007242
- (22) International Filing Date: 1 July 2002 (01.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): FACE-
WORKS SOLUTIONS & TECHNOLOGIES LTD.
[NL/NL]; Keizersgracht 517 D, 1017 DN Amsterdam
(NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): WOLGEN, Philippe
[NL/NL]; Keizersgracht 517D, NL-1017 DN Amsterdam
(NL).
- (74) Agent: FARAGO, Peter; Baaderstr. 3, 80469 München
(DE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: RADIAL OSTEOGENIC DISTRACTOR DEVICE

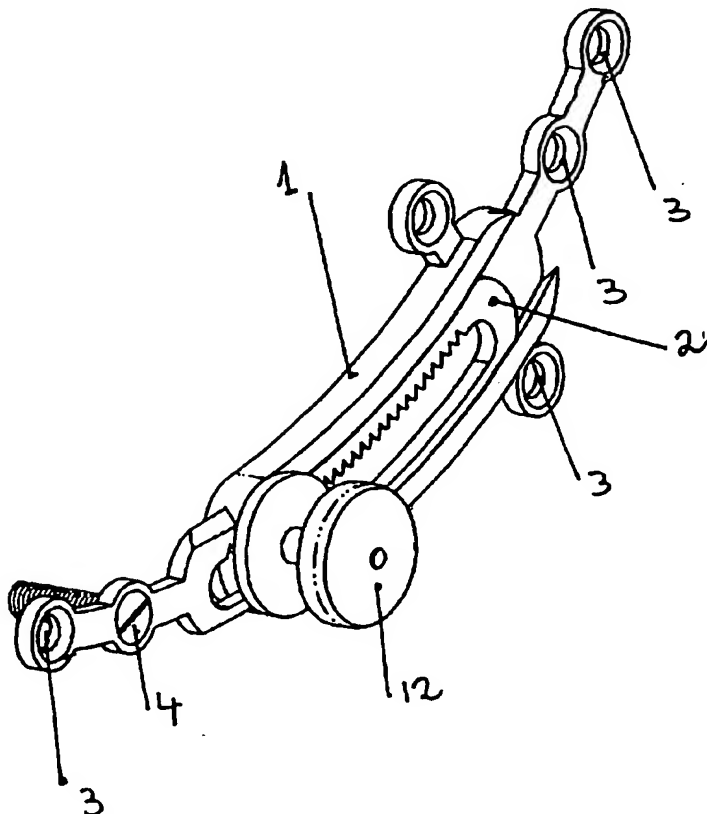

(57) Abstract: The invention concerns a radial osteogenic distractor device comprising a stationary member (1) and at least one translating member (2, 2'), the at least one translating member (2, 2') being slidable within at least one inner lateral channel (10; 21, 22) of the stationary member (1), both the stationary and translating members (1, 2; 2') being provided with respective fixation holes (3) for fixation to an underlying bone, wherein means (5, 8, 12, 13) are provided at an inner edge of the at least one translating member (2, 2') which is opposite to a lateral edge (6) of the at least one translating member (2, 2') facing the at least one channel (10; 21, 22) of the stationary member (1) to displace the at least one translating member (2, 2') within the at least one channel (10; 21, 22) in respect to the stationary member (1).

WO 2004/002341 A1